ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display indoor
————ENBON Wing A Series 500x1000mm indoor



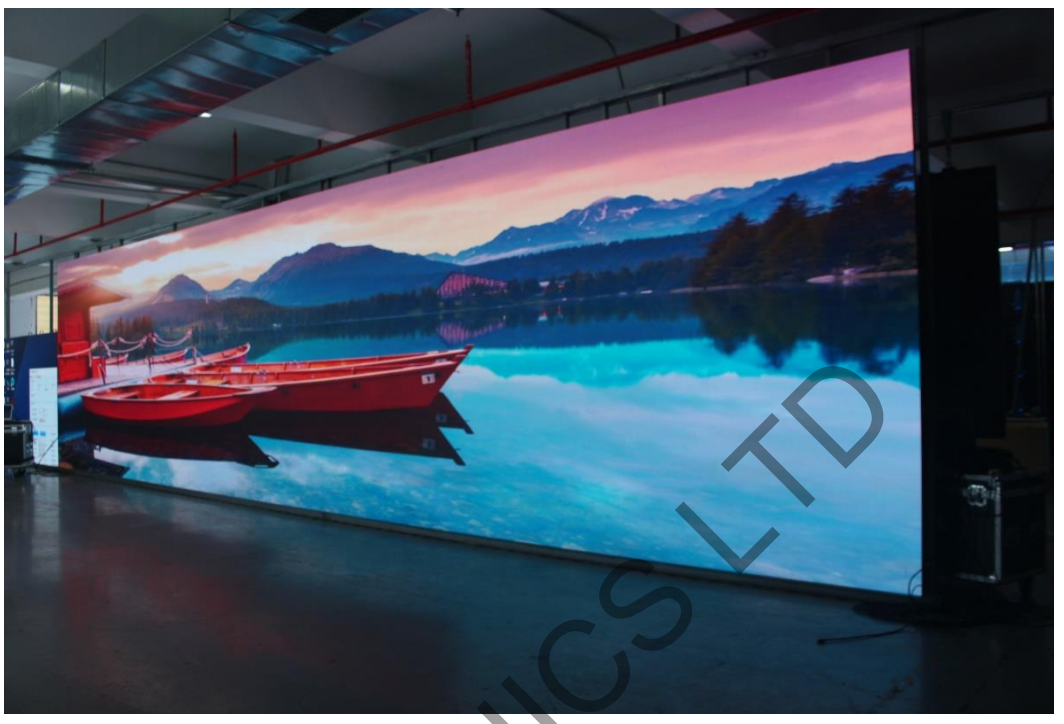

Model	PH2.6 Indoor	PH2.9 Indoor	PH3.91 Indoor	PH4.81 Indoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	4.81 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	43,264 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	52*52 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 13 Scan
LED LAMP TYPE	SMD1515	SMD1515	SMD2121	SMD2121
Cabinet Size(W*H*D)	500mmW*1000mmH*70mmD (0.5 SQ.M)			
Single Cabinet Area (Square meter)	0.5 SQ.M			
Net Weight	About 14 KGS (30.8647 LBS)			
Cabinet Resolution	192*384 Pixels	168*336 Pixels	128*256 Pixels	104*208 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 900 Nit	About 900 Nit	About 1000 Nit	About 1000 Nit
Power Consumption	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C	-30°C----+60°C	-30°C----+60°C	-30°C----+60°C
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP40			
Maintenance way	Back Maintenance, LED Module front Maintenace (optional)			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display indoor
————ENBON Wing A Series 500x1000mm indoor







Model	PH1.95 Indoor	PH2.5 Indoor	PH2.6 Indoor	PH2.9 Indoor
Pixel Pitch	1.95 mm	2.5 mm	2.604 mm	2.976 mm
Pixel Density	262,144 Pixels/SQ.M	160,000 Pixels/SQ.M	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	128*128 Pixels	100*100 Pixels	96*96 Pixels	84*84 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 25 Scan	1 / 32 Scan	1 / 28 Scan
LED LAMP TYPE	SMD1515	SMD1515	SMD1515	SMD1515
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 7.5 KGS (16.5346 LBS)			
Cabinet Resolution	256*256 Pixels	200*200 Pixels	192*192 Pixels	168*168 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 900 Nit	About 900 Nit	About 900 Nit	About 900 Nit
Power Consumption	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP40			
Maintenance way	Back Maintenance, LED Module front Maintenace (optional)			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display indoor
————ENBON Wing A Series 500x1000mm indoor







Model	**PH3.91 Indoor**	**PH4.81 Indoor**		
Pixel Pitch	**3.91 mm**	**4.81 mm**		
Pixel Density	**65,536 Pixels/SQ.M**	**43,264 Pixels/SQ.M**		
Module Size (W*H)	**250mmW*250mmH**	**250mmW*250mmH**		
Module Pixels(W*H)	**64*64 Pixels**	**52*52 Pixels**		
Pixel Configuration	**1R1G1B**	**1R1G1B**		
Driver Mode	**1 / 16 Scan**	**1 / 13 Scan**		
LED LAMP TYPE	**SMD2121**	**SMD2121**		
Cabinet Size(W*H*D)	**500mmW*500mmH*70mmD (0.25 SQ.M)**			
Single Cabinet Area (Square meter)	**0.25 SQ.M**			
Net Weight	**About 7.5 KGS (16.5346 LBS)**			
Cabinet Resolution	**128*128 Pixels**	**104*104 Pixels**		
Color Scale	**65,536 Degree**	**65,536 Degree**		
View Angle(H/V)	**140/120 degree**	**140/120 degree**		
Brightness (Max White balance)	**About 1000 Nit**	**About 1000 Nit**		
Power Consumption	**Max: 140Watt / Panel Average: 90 Watt/ Panel**	**Max: 130Watt / Panel Average: 80 Watt/ Panel**		
Operating Temperature	**-30°C----+60°C**			
Operating Humidity	**10% RH——95% RH**			
Lift Time	**⩾100,000 Hours**			
MTBF	**10,000 Hours**			
Whole Display Flatnes	**⩽0.2mm Juncture**			
Frame Frequency Source	**25-60 Hz/s**			
Refresh Rate	**About 3840 Hz/S with ICND2153**	**About 3840 Hz/S with ICND2153**		
Control Distance	**100meter, Fiber is 20 KM**			
LED Control System	**Nova Star or Colorlight**			
Operating System	**Windows 7,Windows 8, Windows 10**			
Protection Grade	**IP40**			
Maintenance way	**Back Maintenance, LED Module front Maintenace (optional)**			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display outdoor
————ENBON Wing A Series 500x500mm outdoor



Model	PH2.6 Outdoor	PH2.9 Outdoor	PH3.91 Outdoor	PH3.91 Outdoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	3.91 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	65,536 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	64*64 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 8 Scan
LED LAMP TYPE	SMD1415 White	SMD1415 White	SMD1921 White	SMD1921 White
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 8 KGS (16.5346 LBS)			
Cabinet Resolution	192*192 Pixels	168*168 Pixels	128*128 Pixels	128*128 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 4000 Nit	About 4500 Nit	About 5200 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LIMITED

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display outdoor
————ENBON Wing A Series 500x500mm outdoor



Model	PH4.81 Outdoor	PH4.81 Outdoor	PH4.81 Outdoor	PH5.95 Outdoor
Pixel Pitch	4.81 mm	4.81 mm	4.81 mm	5.95 mm
Pixel Density	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	28,224 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	52*52 Pixels	52*52 Pixels	52*52 Pixels	42*42 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 13 Scan	1 / 7 Scan	1 / 13 Scan	1 / 7 Scan
LED LAMP TYPE	SMD1921 White	SMD1921 White	SMD2727 White	SMD2727 White
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 8 KGS (16.5346 LBS)			
Cabinet Resolution	104*104 Pixels	104*104 Pixels	104*104 Pixels	84*84 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 5500 Nit	About 5000 Nit	About 5000 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LIMITED

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display outdoor
————ENBON Wing A Series 500x1000mm outdoor





Model	PH2.6 Outdoor	PH2.9 Outdoor	PH3.91 Outdoor	PH3.91 Outdoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	3.91 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	65,536 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	64*64 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 8 Scan
LED LAMP TYPE	SMD1415 White	SMD1415 White	SMD1921 White	SMD1921 White
Cabinet Size(W*H*D)	500mmW*1000mmH*70mmD (0.5 SQ.M)			
Single Cabinet Area (Square meter)	0.5 SQ.M			
Net Weight	About 14 KGS (30.8647 LBS)			
Cabinet Resolution	192*384 Pixels	168*336 Pixels	128*256 Pixels	128*256 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 4000 Nit	About 4500 Nit	About 5200 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing A Rental LED Display outdoor
————ENBON Wing A Series 500x1000mm outdoor





Model	PH4.81 Outdoor	PH4.81 Outdoor	PH4.81 Outdoor	PH5.95 Outdoor
Pixel Pitch	4.81 mm	4.81 mm	4.81 mm	5.95 mm
Pixel Density	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	28,224 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	52*52 Pixels	52*52 Pixels	52*52 Pixels	42*42 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 13 Scan	1 / 7 Scan	1 / 13 Scan	1 / 7 Scan
LED LAMP TYPE	SMD1921 White	SMD1921 White	SMD2727 White	SMD2727 White
Cabinet Size(W*H*D)	500mmW*1000mmH*70mmD (0.5 SQ.M)			
Single Cabinet Area (Square meter)	0.5 SQ.M			
Net Weight	About 14 KGS (30.8647 LBS)			
Cabinet Resolution	104*208 Pixels	104*208 Pixels	104*208 Pixels	84*168 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 5500 Nit	About 5000 Nit	About 5000 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing B Rental LED Display indoor
————ENBON Wing B Series 500x500mm indoor







▲ Angle regulator are optional

Model	PH1.95 Indoor	PH2.5 Indoor	PH2.6 Indoor	PH2.9 Indoor
Pixel Pitch	1.95 mm	2.5 mm	2.604 mm	2.976 mm
Pixel Density	262,144 Pixels/SQ.M	160,000 Pixels/SQ.M	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	128*128 Pixels	100*100 Pixels	96*96 Pixels	84*84 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 25 Scan	1 / 32 Scan	1 / 28 Scan
LED LAMP TYPE	SMD1515	SMD1515	SMD1515	SMD1515
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 7.5 KGS (16.5346 LBS)			
Cabinet Resolution	256*256 Pixels	200*200 Pixels	192*192 Pixels	168*168 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 900 Nit	About 900 Nit	About 900 Nit	About 900 Nit
Power Consumption	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP40			
Maintenance way	Back Maintenance, LED Module front Maintenace (optional)			

ENBON OPTOELECTRONICS LTD

Wing B Rental LED Display indoor
————ENBON Wing B Series 500x500mm indoor

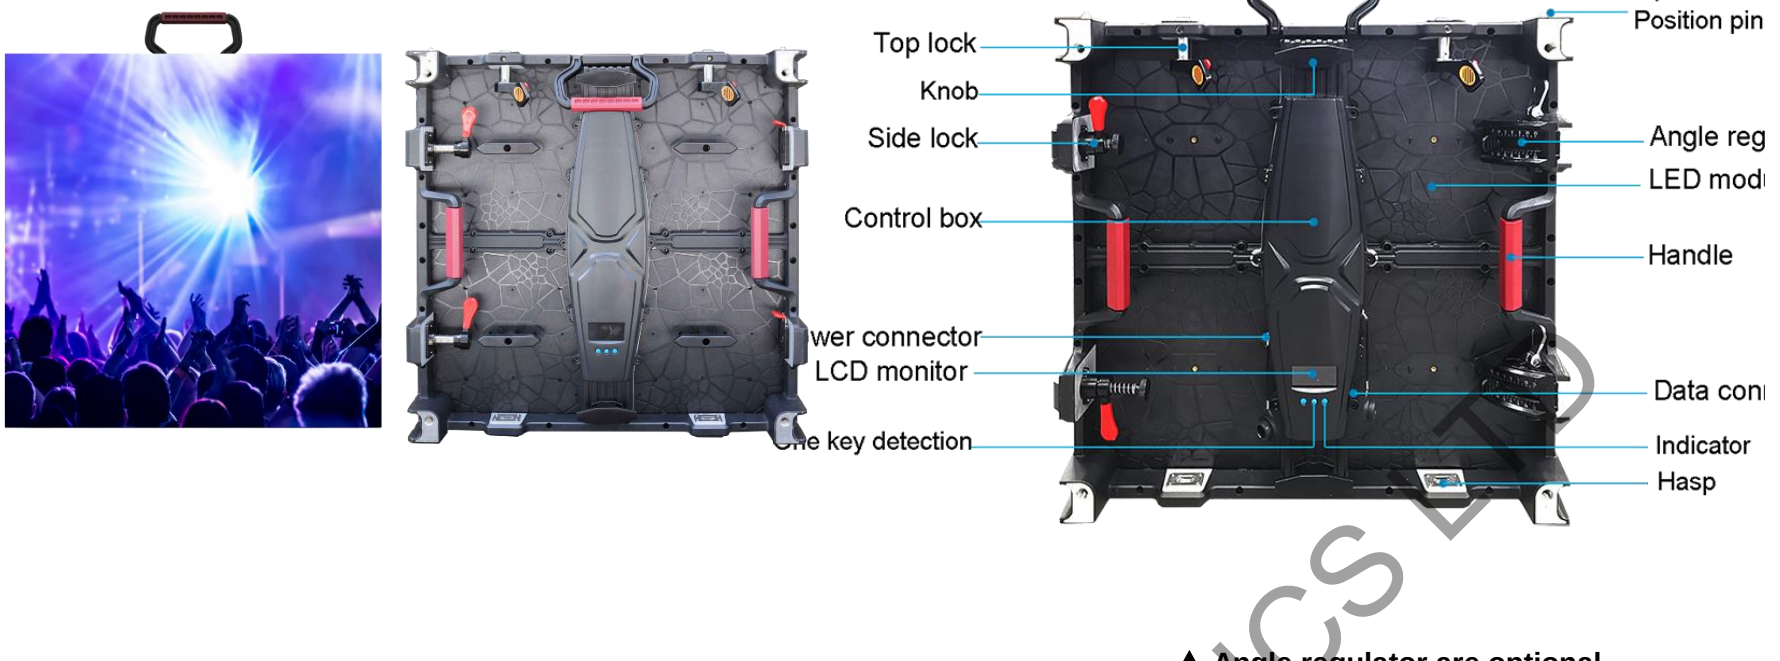

▲ Angle regulator are optional

Model	**PH3.91 Indoor**	**PH4.81 Indoor**		
Pixel Pitch	**3.91 mm**	**4.81 mm**		
Pixel Density	**65,536 Pixels/SQ.M**	**43,264 Pixels/SQ.M**		
Module Size (W*H)	**250mmW*250mmH**	**250mmW*250mmH**		
Module Pixels(W*H)	**64*64 Pixels**	**52*52 Pixels**		
Pixel Configuration	**1R1G1B**	**1R1G1B**		
Driver Mode	**1 / 16 Scan**	**1 / 13 Scan**		
LED LAMP TYPE	**SMD2121**	**SMD2121**		
Cabinet Size(W*H*D)	**500mmW*500mmH*70mmD (0.25 SQ.M)**			
Single Cabinet Area (Square meter)	**0.25 SQ.M**			
Net Weight	**About 7.5 KGS (16.5346 LBS)**			
Cabinet Resolution	**128*128 Pixels**	**104*104 Pixels**		
Color Scale	**65,536 Degree**	**65,536 Degree**		
View Angle(H/V)	**140/120 degree**	**140/120 degree**		
Brightness (Max White balance)	**About 1000 Nit**	**About 1000 Nit**		
Power Consumption	**Max: 140Watt / Panel Average: 90 Watt/ Panel**	**Max: 130Watt / Panel Average: 80 Watt/ Panel**		
Operating Temperature	**-30°C----+60°C**			
Operating Humidity	**10% RH——95% RH**			
Lift Time	**⩾100,000 Hours**			
MTBF	**10,000 Hours**			
Whole Display Flatnes	**⩽0.2mm Juncture**			
Frame Frequency Source	**25-60 Hz/s**			
Refresh Rate	**About 3840 Hz/S with ICND2153**	**About 3840 Hz/S with ICND2153**		
Control Distance	**100meter, Fiber is 20 KM**			
LED Control System	**Nova Star or Colorlight**			
Operating System	**Windows 7,Windows 8, Windows 10**			
Protection Grade	**IP40**			
Maintenance way	**Back Maintenance, LED Module front Maintenace (optional)**			

ENBON OPTOELECTRONICS LIMITED

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing B Rental LED Display outdoor
————ENBON Wing B Series 500x500mm outdoor







▲ Angle regulator are optional

Model	PH2.6 Outdoor	PH2.9 Outdoor	PH3.91 Outdoor	PH3.91 Outdoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	3.91 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	65,536 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	64*64 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 8 Scan
LED LAMP TYPE	SMD1415 White	SMD1415 White	SMD1921 White	SMD1921 White
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 7.5 KGS (16.5346 LBS)			
Cabinet Resolution	192*192 Pixels	168*168 Pixels	128*128 Pixels	128*128 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 4000 Nit	About 4500 Nit	About 5200 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing B Rental LED Display outdoor
————ENBON Wing B Series 500x500mm outdoor







▲ Angle regulator are optional

Model	PH4.81 Outdoor	PH4.81 Outdoor	PH4.81 Outdoor	PH5.95 Outdoor
Pixel Pitch	4.81 mm	4.81 mm	4.81 mm	5.95 mm
Pixel Density	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	28,224 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	52*52 Pixels	52*52 Pixels	52*52 Pixels	42*42 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 13 Scan	1 / 7 Scan	1 / 13 Scan	1 / 7 Scan
LED LAMP TYPE	SMD1921 White	SMD1921 White	SMD2727 White	SMD2727 White
Cabinet Size(W*H*D)	500mmW*500mmH*70mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 7.5 KGS (16.5346 LBS)			
Cabinet Resolution	104*104 Pixels	104*104 Pixels	104*104 Pixels	84*84 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 5500 Nit	About 5000 Nit	About 5000 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing C Rental LED Display indoor
————ENBON Wing C Series 500x500mm indoor

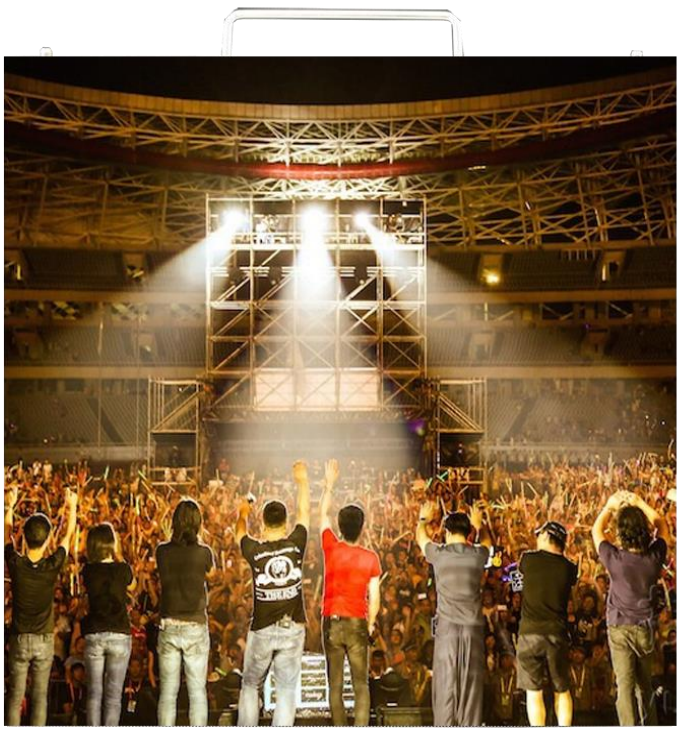



Model	PH1.95 Indoor	PH2.5 Indoor	PH2.6 Indoor	PH2.9 Indoor
Pixel Pitch	1.95 mm	2.5 mm	2.604 mm	2.976 mm
Pixel Density	262,144 Pixels/SQ.M	160,000 Pixels/SQ.M	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	128*128 Pixels	100*100 Pixels	96*96 Pixels	84*84 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 25 Scan	1 / 32 Scan	1 / 28 Scan
LED LAMP TYPE	SMD1515	SMD1515	SMD1515	SMD1515
Cabinet Size(W*H*D)	500mmW*500mmH*88mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 10 KGS (22.0462 LBS)			
Cabinet Resolution	256*256 Pixels	200*200 Pixels	192*192 Pixels	168*168 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 900 Nit	About 900 Nit	About 900 Nit	About 900 Nit
Power Consumption	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel	Max: 140Watt / Panel Average: 90 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP40			
Maintenance way	Back Maintenance, LED Module front Maintenace (optional)			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing C Rental LED Display indoor
————ENBON Wing C Series 500x500mm indoor

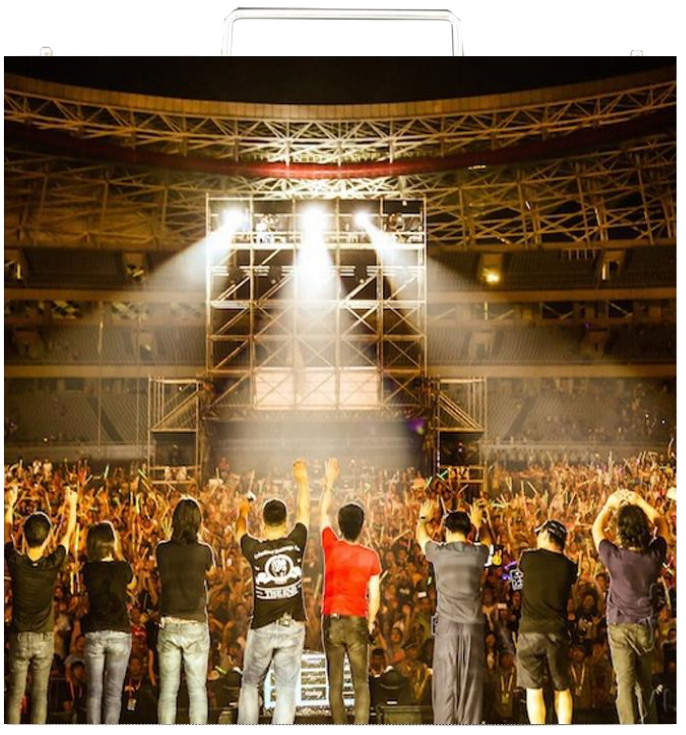



Model	**PH3.91 Indoor**	**PH4.81 Indoor**		
Pixel Pitch	**3.91 mm**	**4.81 mm**		
Pixel Density	**65,536 Pixels/SQ.M**	**43,264 Pixels/SQ.M**		
Module Size (W*H)	**250mmW*250mmH**	**250mmW*250mmH**		
Module Pixels(W*H)	**64*64 Pixels**	**52*52 Pixels**		
Pixel Configuration	**1R1G1B**	**1R1G1B**		
Driver Mode	**1 / 16 Scan**	**1 / 13 Scan**		
LED LAMP TYPE	**SMD2121**	**SMD2121**		
Cabinet Size(W*H*D)	**500mmW*500mmH*88mmD (0.25 SQ.M)**			
Single Cabinet Area (Square meter)	**0.25 SQ.M**			
Net Weight	**About 10 KGS (22.0462 LBS)**			
Cabinet Resolution	**128*128 Pixels**	**104*104 Pixels**		
Color Scale	**65,536 Degree**	**65,536 Degree**		
View Angle(H/V)	**140/120 degree**	**140/120 degree**		
Brightness (Max White balance)	**About 1000 Nit**	**About 1000 Nit**		
Power Consumption	**Max: 140Watt / Panel Average: 90 Watt/ Panel**	**Max: 130Watt / Panel Average: 80 Watt/ Panel**		
Operating Temperature	**-30°C----+60°C**			
Operating Humidity	**10% RH——95% RH**			
Lift Time	**⩾100,000 Hours**			
MTBF	**10,000 Hours**			
Whole Display Flatnes	**⩽0.2mm Juncture**			
Frame Frequency Source	**25-60 Hz/s**			
Refresh Rate	**About 3840 Hz/S with ICND2153**	**About 3840 Hz/S with ICND2153**		
Control Distance	**100meter, Fiber is 20 KM**			
LED Control System	**Nova Star or Colorlight**			
Operating System	**Windows 7,Windows 8, Windows 10**			
Protection Grade	**IP40**			
Maintenance way	**Back Maintenance, LED Module front Maintenace (optional)**			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing C Rental LED Display outdoor
————ENBON Wing C Series 500x500mm outdoor





Model	PH2.6 Outdoor	PH2.9 Outdoor	PH3.91 Outdoor	PH3.91 Outdoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	3.91 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	65,536 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	64*64 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 8 Scan
LED LAMP TYPE	SMD1415 White	SMD1415 White	SMD1921 White	SMD1921 White
Cabinet Size(W*H*D)	500mmW*500mmH*88mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 10 KGS (22.0462 LBS)			
Cabinet Resolution	192*192 Pixels	168*168 Pixels	128*128 Pixels	128*128 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 4000 Nit	About 4500 Nit	About 5200 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing C Rental LED Display outdoor
————ENBON Wing C Series 500x500mm outdoor





Model	PH4.81 Outdoor	PH4.81 Outdoor	PH4.81 Outdoor	PH5.95 Outdoor
Pixel Pitch	4.81 mm	4.81 mm	4.81 mm	5.95 mm
Pixel Density	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	43,264 Pixels/SQ.M	28,224 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	52*52 Pixels	52*52 Pixels	52*52 Pixels	42*42 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 13 Scan	1 / 7 Scan	1 / 13 Scan	1 / 7 Scan
LED LAMP TYPE	SMD1921 White	SMD1921 White	SMD2727 White	SMD2727 White
Cabinet Size(W*H*D)	500mmW*500mmH*88mmD (0.25 SQ.M)			
Single Cabinet Area (Square meter)	0.25 SQ.M			
Net Weight	About 10 KGS (22.0462 LBS)			
Cabinet Resolution	104*104 Pixels	104*104 Pixels	104*104 Pixels	84*84 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 4000 Nit	About 5500 Nit	About 5000 Nit	About 5000 Nit
Power Consumption	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel	Max: 230Watt / Panel Average: 130 Watt/ Panel
Operating Temperature	-30°C----+60°C			
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP65			
Maintenance way	Back Maintenance			

ENBON OPTOELECTRONICS LTD

ENBON OPTOELECTRONICS LIMITED
Mobile and Wechat.: +86 18575579343; EMAIL: eb@mail.eb-leddisplay.com; www.enbonled.com

Wing D Rental LED Display indoor
————ENBON Wing D Series 500x1000mm indoor







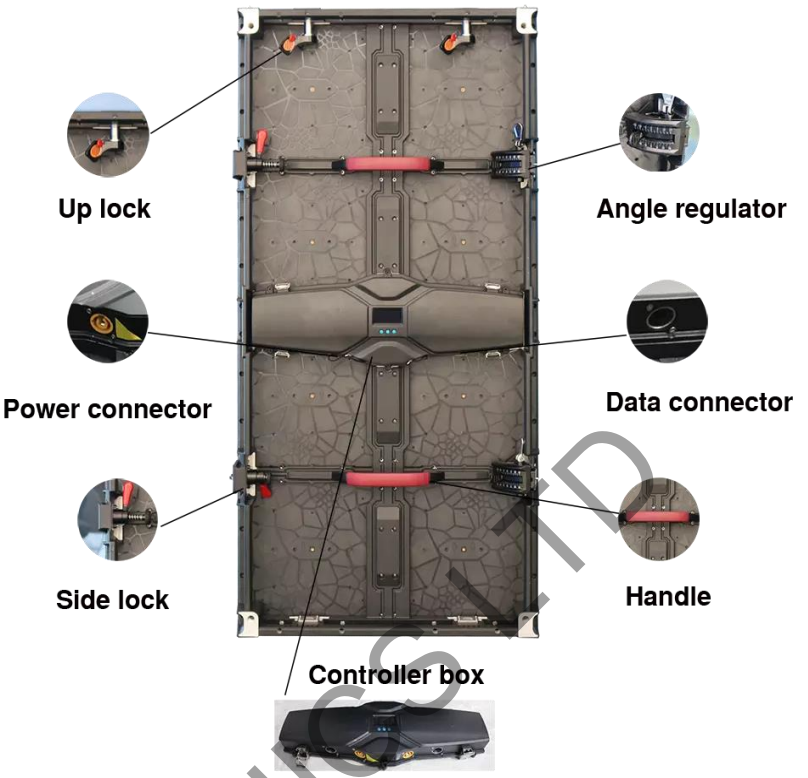

Model	PH2.6 Indoor	PH2.9 Indoor	PH3.91 Indoor	PH4.81 Indoor
Pixel Pitch	2.604 mm	2.976 mm	3.91 mm	4.81 mm
Pixel Density	147,456 Pixels/SQ.M	112,896 Pixels/SQ.M	65,536 Pixels/SQ.M	43,264 Pixels/SQ.M
Module Size (W*H)	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH	250mmW*250mmH
Module Pixels(W*H)	96*96 Pixels	84*84 Pixels	64*64 Pixels	52*52 Pixels
Pixel Configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Driver Mode	1 / 32 Scan	1 / 28 Scan	1 / 16 Scan	1 / 13 Scan
LED LAMP TYPE	SMD1515	SMD1515	SMD2121	SMD2121
Cabinet Size(W*H*D)	500mmW*1000mmH*82mmD (0.5 SQ.M)			
Single Cabinet Area (Square meter)	0.5 SQ.M			
Net Weight	About 12.5 KGS (27.5577 LBS)			
Cabinet Resolution	192*384 Pixels	168*336 Pixels	128*256 Pixels	104*208 Pixels
Color Scale	65,536 Degree	65,536 Degree	65,536 Degree	65,536 Degree
View Angle(H/V)	140/120 degree	140/120 degree	140/120 degree	140/120 degree
Brightness (Max White balance)	About 900 Nit	About 900 Nit	About 1000 Nit	About 1000 Nit
Power Consumption	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 280Watt / Panel Average: 180 Watt/ Panel	Max: 260Watt / Panel Average: 160 Watt/ Panel
Operating Temperature	-30°C----+60°C	-30°C----+60°C	-30°C----+60°C	-30°C----+60°C
Operating Humidity	10% RH——95% RH			
Lift Time	⩾100,000 Hours			
MTBF	10,000 Hours			
Whole Display Flatnes	⩽0.2mm Juncture			
Frame Frequency Source	25-60 Hz/s			
Refresh Rate	About 3840 Hz/S with ICND2055	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153	About 3840 Hz/S with ICND2153
Control Distance	100meter, Fiber is 20 KM			
LED Control System	Nova Star or Colorlight			
Operating System	Windows 7,Windows 8, Windows 10			
Protection Grade	IP40			
Maintenance way	Back Maintenance, LED Module front Maintenace (optional)			

ENBON OPTOELECTRONICS LTD